



FWX 250V 35-2500A

Type	Electrical Characteristics				Ordering Information			Dimensions	Curves		
	Rated Current RMS-Amps	I ² t (A ² Sec)		Watts Loss	Part Number	Carton Qty.	Carton Weight (lbs)	Figure Number	BIF #		
		Pre-arc	Clearing at 250V								
FWX 250V	35	50	230	4.2	FWX-35A	5	1.40	Fig. 1	359		
	40	60	310	5.2	FWX-40A						
	45	80	390	5.7	FWX-45A						
	50	100	520	6.0	FWX-50A						
	60	140	740	8.1	FWX-60A						
	70	330	1400	7.2	FWX-70A	1	0.32				
	80	430	1850	8.1	FWX-80A						
	90	570	2450	9.0	FWX-90A						
	100	740	3150	10.0	FWX-100A						
	125	1130	4850	12.5	FWX-125A						
	150	1620	6950	15.7	FWX-150A						
	175	2170	9300	18.5	FWX-175A						
	200	2790	12000	22	FWX-200A						
	225	3210	14700	24	FWX-225A						
	250	3960	18100	27	FWX-250A					1	0.52
	275	4720	21600	31	FWX-275A						
	300	6000	27300	32	FWX-300A						
	350	10600	48600	39	FWX-350A						
	400	14500	66100	44	FWX-400A						
	450	22100	101000	49	FWX-450A						
	500	28000	128000	54	FWX-500A						
	600	41100	188000	62	FWX-600A						
	700	48800	190000	72	FWX-700A	1	0.90				
	800	59000	230000	84	FWX-800A						
	1000	44000	360000	100	FWX-1000AH						
1200	92000	750000	103	FWX-1200AH							
1500	120000	880000	140	FWX-1500AH	1			2.86			
1600	160000	1200000	140	FWX-1600AH							
2000	320000	2300000	151	FWX-2000AH							
2500	670000	4700000	163	FWX-2500AH							
									Fig. 2	35785299	
							Fig. 3				

† U.L. Recognition on 35 through 800 amperes only.

1 kg = 2.2 lbs 1 lb = 0.45 kg

- Interrupting rating 200kA RMS Symmetrical.
- Watts loss provided at rated current.
- (250 Vdc/Interrupting rating 20kA) U.L. Recognition on 35 through 800 amperes only.




FWX 250V 35-2500A

Electrical Characteristics

Total Clearing I²t


The total clearing I²t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I²t is found by multiplying by correction factor, K, given as a function of applied working voltage, E_g, (RMS).



1) 35-800 Amp Range
2) 1000-2500 Amp Range

Arc Voltage


This curve gives the peak arc voltage, U_L, which may appear across the fuse during its operation as a function of the applied working voltage, E_g, (RMS) at a power factor of 15%.



1) 35-800 Amp Range
2) 1000-2500 Amp Range

Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K_p, is given as a function of the RMS load current, I_b, in % of the rated current.

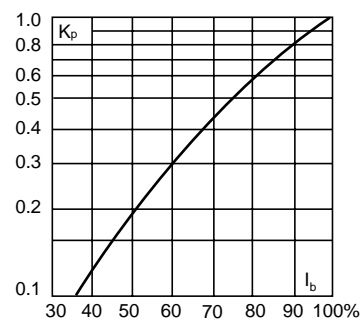

Dimensions

Fig. 1: 35-800 Amp Range

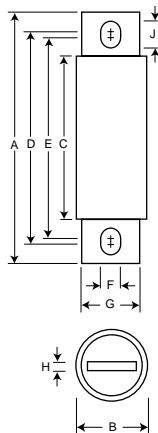


Fig. 2: 1000-1200 Amp Range





Fig. 3: 1500-2500 Amp Range



Order #	Fig.	A	B	C	D	E	F	G	H	J	Thread Depth
FWX-35A-60A	1	3.19	0.81	1.59	2.59	2.25	0.34	0.63	0.13	0.52	—
FWX-70A-200A	1	3.13	1.22	1.59	2.44	2.19	0.34	1.00	0.19	0.47	—
FWX-225A-600A	1	3.84	1.50	1.59	2.94	2.25	0.41	1.00	0.25	0.75	—
FWX-700A-800A	1	3.84	2.00	1.59	3.03	2.28	0.41	1.50	0.25	0.78	—
FWX-1000AH-1200AH	2	2.59	3.00	1.50	—	—	—	—	—	—	Tapped 3/8"-24 x 1/2"
FWX-1500AH-2500AH	3	2.59	3.50	1.50	1.50	—	—	—	—	—	Tapped 3/8"-24 x 1/2"

Dimension in inches.
1mm = 0.0394" 1" = 25.4mm

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

This datasheet has been downloaded from:

datasheet.eeworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn